SKKT 323; SKKH 323

THYRISTOR BRIDGE,SCR,BRIDGE



SEMIPACK® 3

Thyristor / Diode Modules

SKKT 323

SKKH 323

Preliminary Data


Features

- Industrial standard package
- Electrically insulated base plate
- Heat transfer through aluminium oxide ceramic insulated metal base plate
- Chip soldered on direct copper bonded Al_2O_3 ceramic
- Thyristor chip with center gate
- UL recognition applied for file no. E63532

Typical Applications*

- DC motor control (e. g. for machine tools)
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

1) See the assembly instructions



SKKT SKKH

V_{RSM} V	V_{RRM}, V_{DRM} V	I_{TRMS} = 520 A (maximum value for continuous operation) I_{TAV} = 323 A (sin. 180; T_c = 84 °C)		
1300	1200	SKKT 323/12E	SKKH 323/12E	
1700	1600	SKKT 323/16E	SKKH 323/16E	

Symbol	Conditions	Values	Units
I_{TAV}	sin. 180; T_c = 85 (100) °C;	320 (241)	A
I_{TSM}	T_{vj} = 25 °C; 10 ms	9500	A
	T_{vj} = 130 °C; 10 ms	8200	A
i²t	T_{vj} = 25 °C; 8,3 ... 10 ms	450000	A²s
	T_{vj} = 130 °C; 8,3 ... 10 ms	336000	A²s
V_T	T_{vj} = 25 °C; I_T = 750 A	max. 1,45	V
$V_{T(TO)}$	T_{vj} = 130 °C	max. 0,81	V
r_T	T_{vj} = 130 °C	max. 0,85	mΩ
I_{DD}; I_{RD}	T_{vj} = 130 °C; V_{RD} = V_{RRM}; V_{DD} = V_{DRM}	max. 100	mA
t_{gd}	T_{vj} = 25 °C; I_G = 1 A; di_G/dt = 1 A/µs	1	µs
t_{gr}	V_D = 0,67 * V_{DRM}	2	µs
$(di/dt)_{cr}$	T_{vj} = 130 °C	max. 130	A/µs
$(dv/dt)_{cr}$	T_{vj} = 130 °C	max. 1000	V/µs
t_q	T_{vj} = 130 °C ,typ.	150	µs
I_H	T_{vj} = 25 °C; typ. / max.	150 / 500	mA
I_L	T_{vj} = 25 °C; R_G = 33 Ω; typ. / max.	300 / 2000	mA
V_{GT}	T_{vj} = 25 °C; d.c.	min. 2	V
I_{GT}	T_{vj} = 25 °C; d.c.	min. 150	mA
V_{GD}	T_{vj} = 130 °C; d.c.	max. 0,25	V
I_{GD}	T_{vj} = 130 °C; d.c.	max. 10	mA
$R_{th(j-c)}$	cont.; per thyristor / per module	0,091 / 0,0455	K/W
$R_{th(j-c)}$	sin. 180; per thyristor / per module	0,095 / 0,0475	K/W
$R_{th(j-c)}$	rec. 120; per thyristor / per module	0,11 / 0,055	K/W
$R_{th(c-s)}$	per thyristor / per module	0,08 / 0,04	K/W
T_{vj}		- 40 ... + 130	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
M_s	to heatsink	5 ± 15 %[1)]	Nm
M_t	to terminals	9 ± 15 %	Nm
a		5 * 9,81	m/s²
m	approx.	410	g
Case	SKKT	A 43a	
	SKKH	A 56a	

 © by SEMIKRON

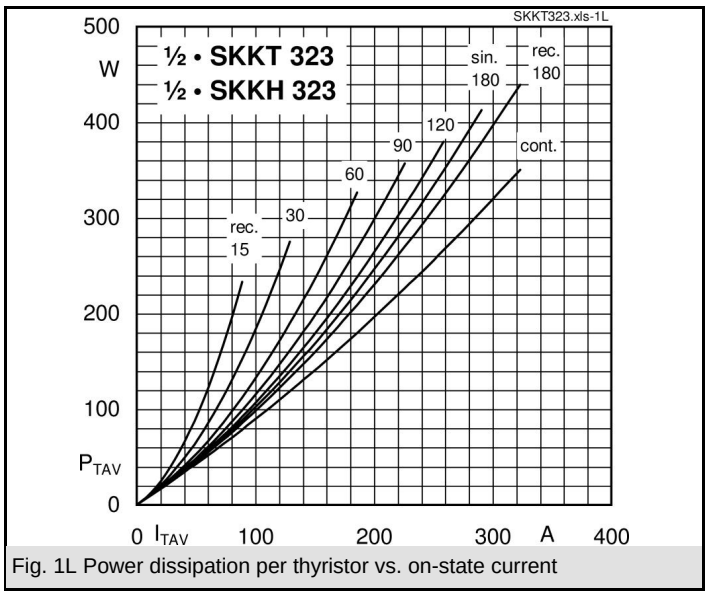


Fig. 1L Power dissipation per thyristor vs. on-state current

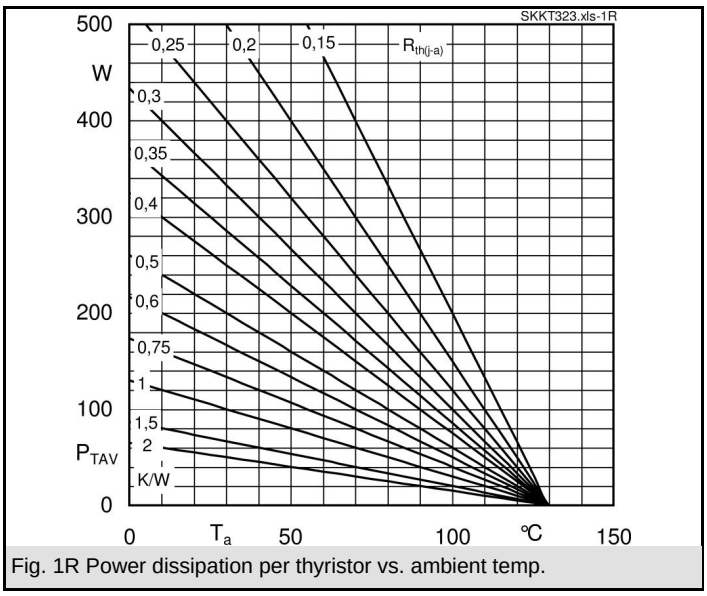


Fig. 1R Power dissipation per thyristor vs. ambient temp.

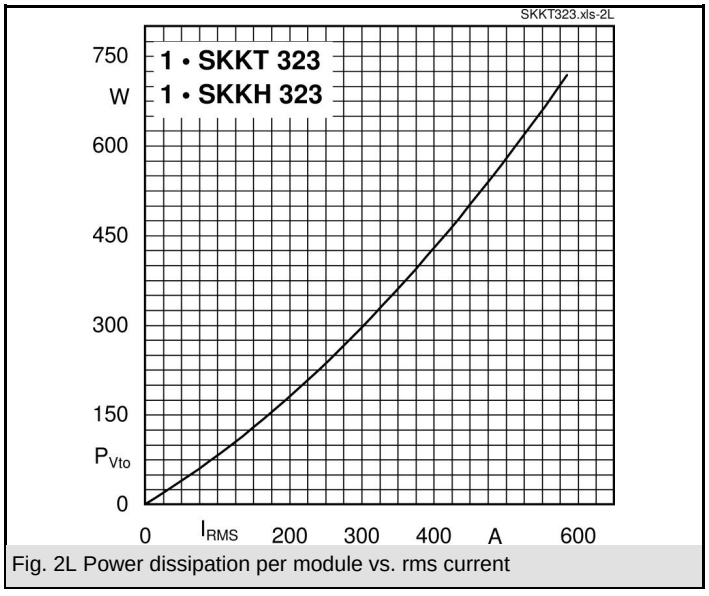


Fig. 2L Power dissipation per module vs. rms current

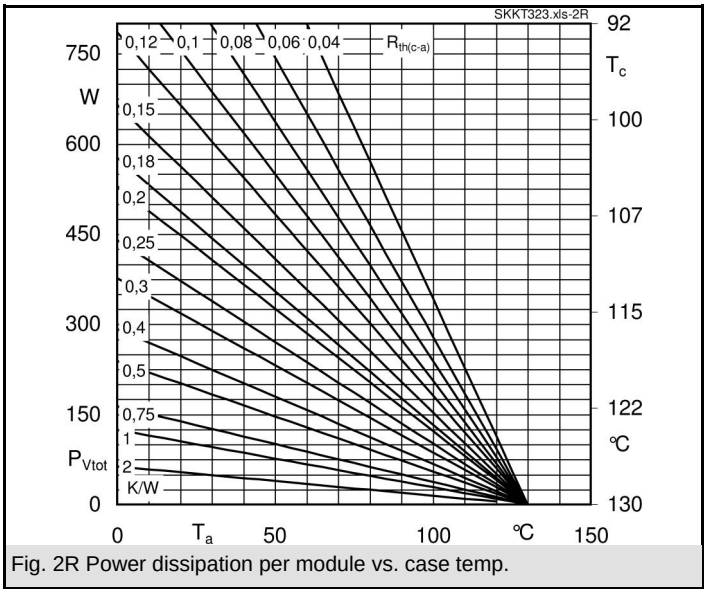


Fig. 2R Power dissipation per module vs. case temp.

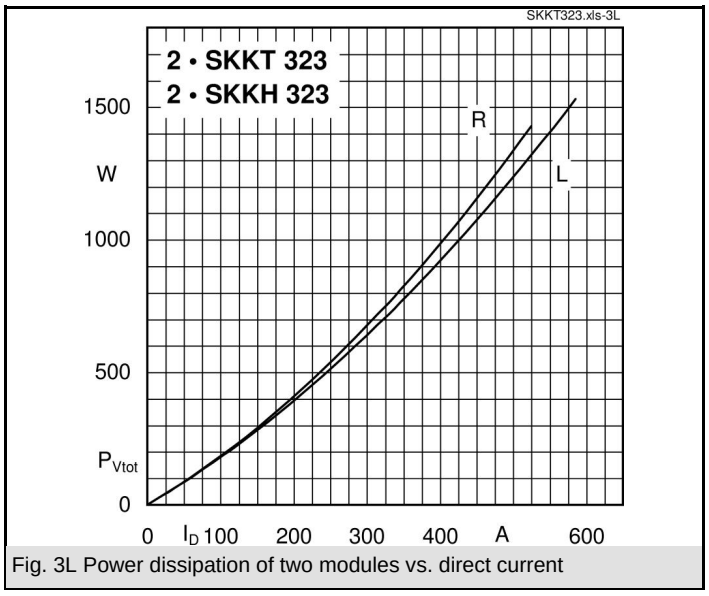


Fig. 3L Power dissipation of two modules vs. direct current

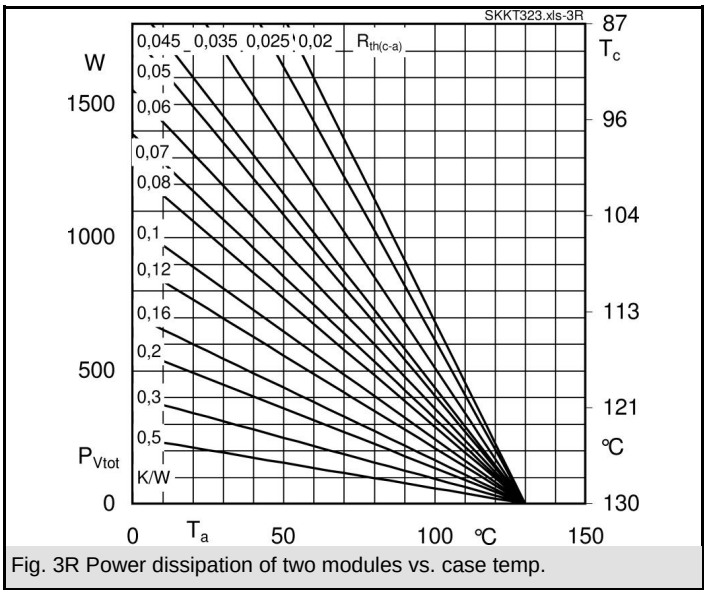


Fig. 3R Power dissipation of two modules vs. case temp.

 © by SEMIKRON

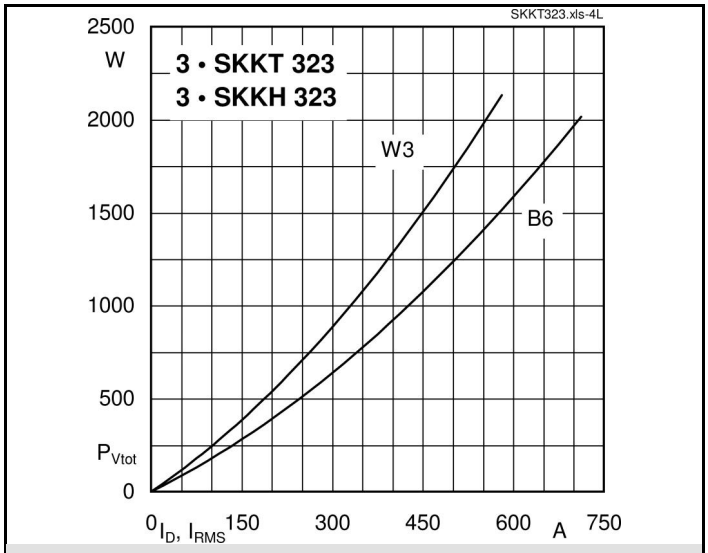


Fig. 4L Power dissipation of three modules vs. direct and rms current

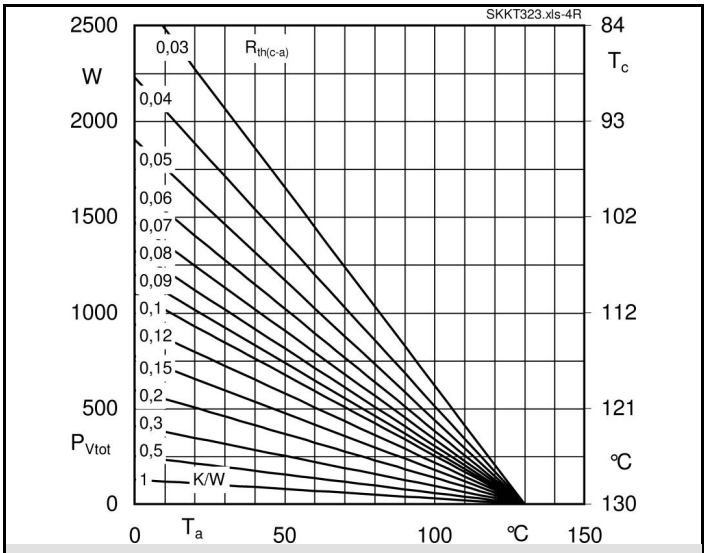


Fig. 4R Power dissipation of three modules vs. case temp.

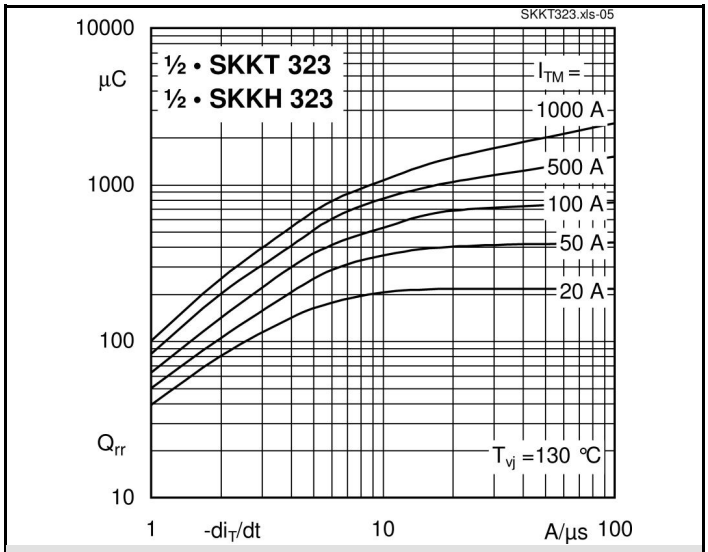


Fig. 5 Recovered charge vs. current decrease

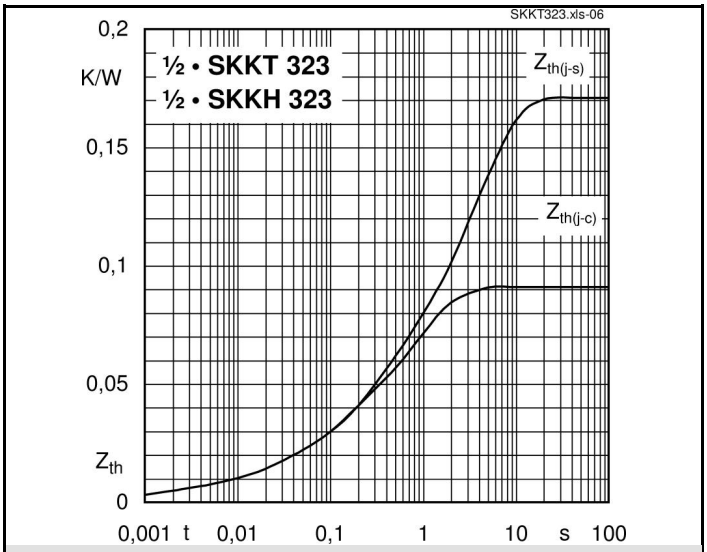


Fig. 6 Transient thermal impedance vs. time

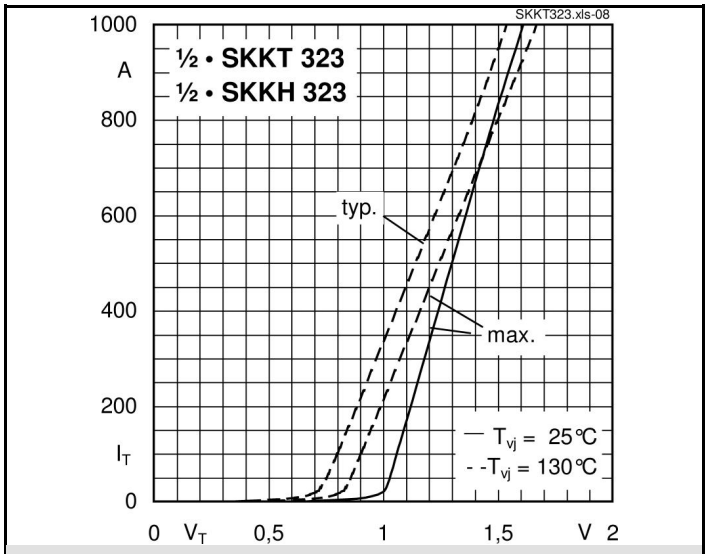


Fig. 7 On-state characteristics

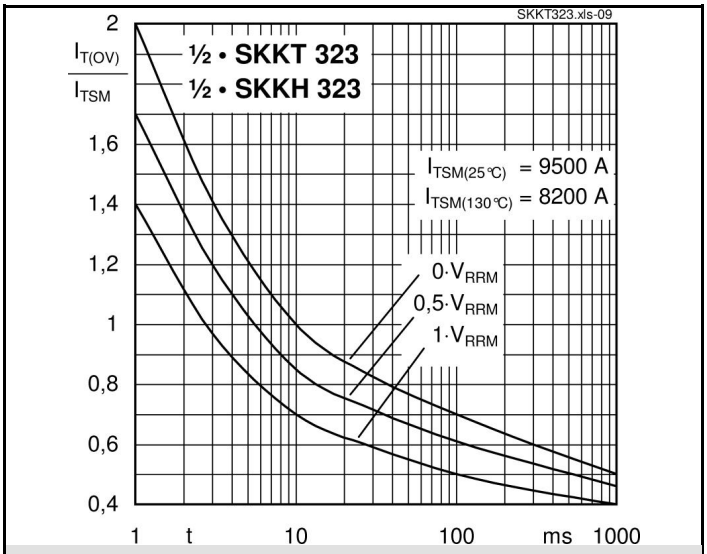


Fig. 8 Surge overload current vs. time

 © by SEMIKRON



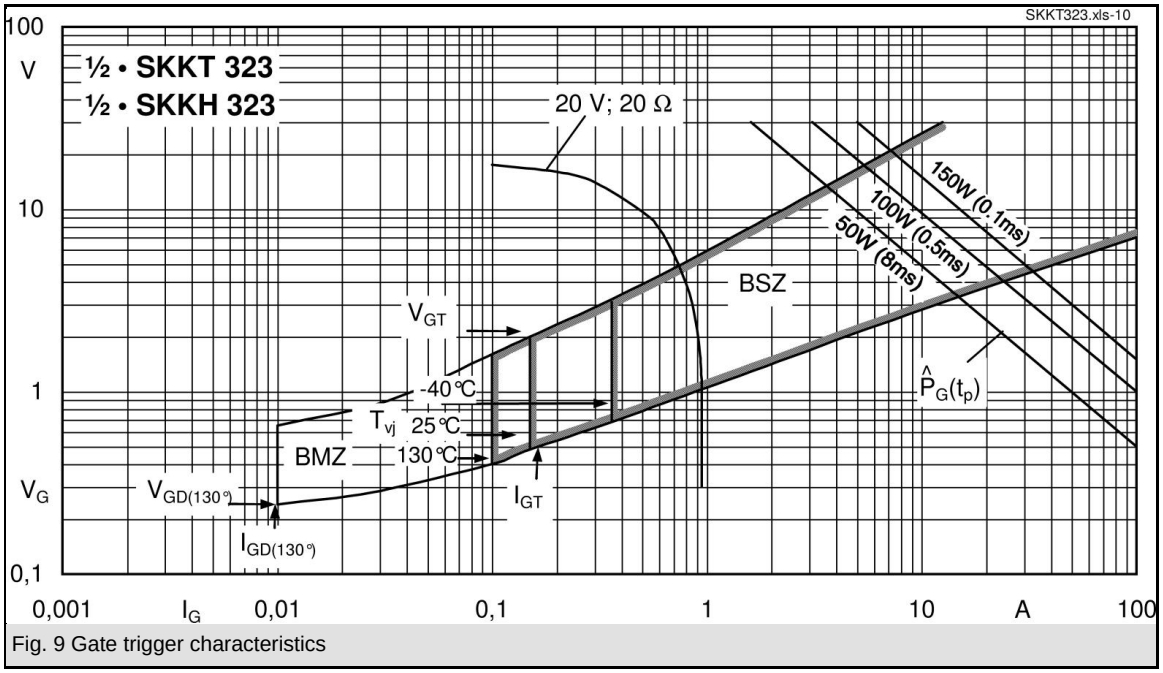


Fig. 9 Gate trigger characteristics

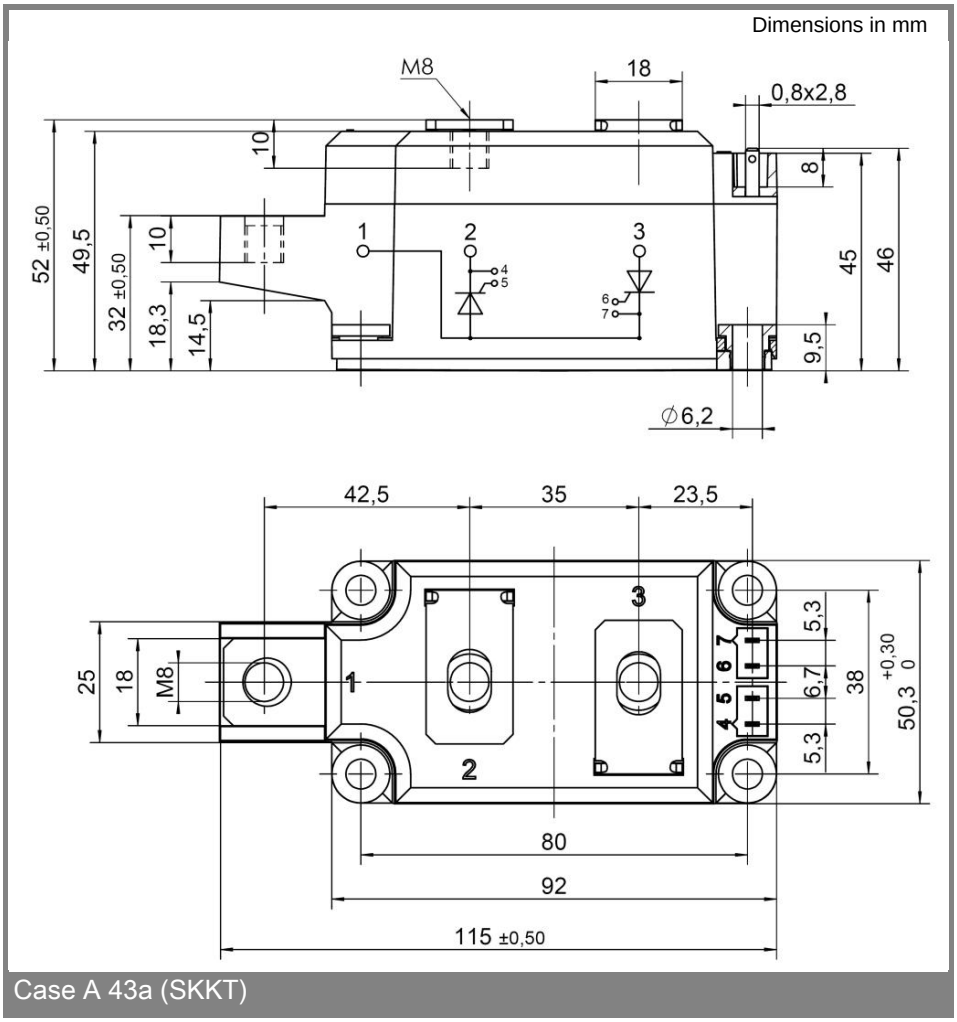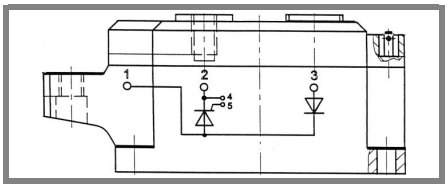

Case A 43a (SKKT)


Case A 56a SKKH

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We

 © by SEMIKRON

therefore strongly recommend prior consultation of our personal.

 © by SEMIKRON